

HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)





NOTES:

- Current Rating:0.5A/Contact
- Voltage Rating:250V AC
- Contact Resistance:35milliohm Max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:500MegoHM Min
- Operation Temperature:-20°C to +105°C
- Housing Material:PB1+30%G.F UL94V-0 BK
- Cover Material:PB1+30%G.F UL94V-0 BK
- Terminal Material:Phosphor Bronze
- Board Lock Material:Phosphor Bronze
- Terminal plating:Sn-Au over Ni
- Board Lock plating:Sn over Ni

Ordering Information

6321D-XXX SD XX P X X 01

No. of Pins Contact Plating Type Packing
S1=5u"Gold/Tin W:With Board Lock T=Tube
S2=5u"Gold/Tin N:Without Board Lock

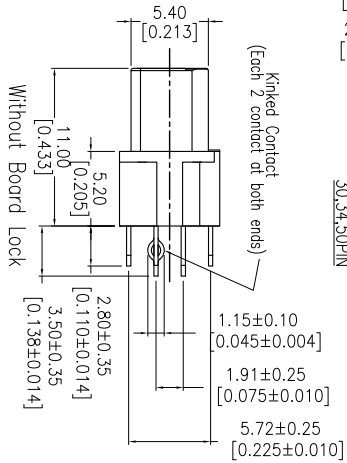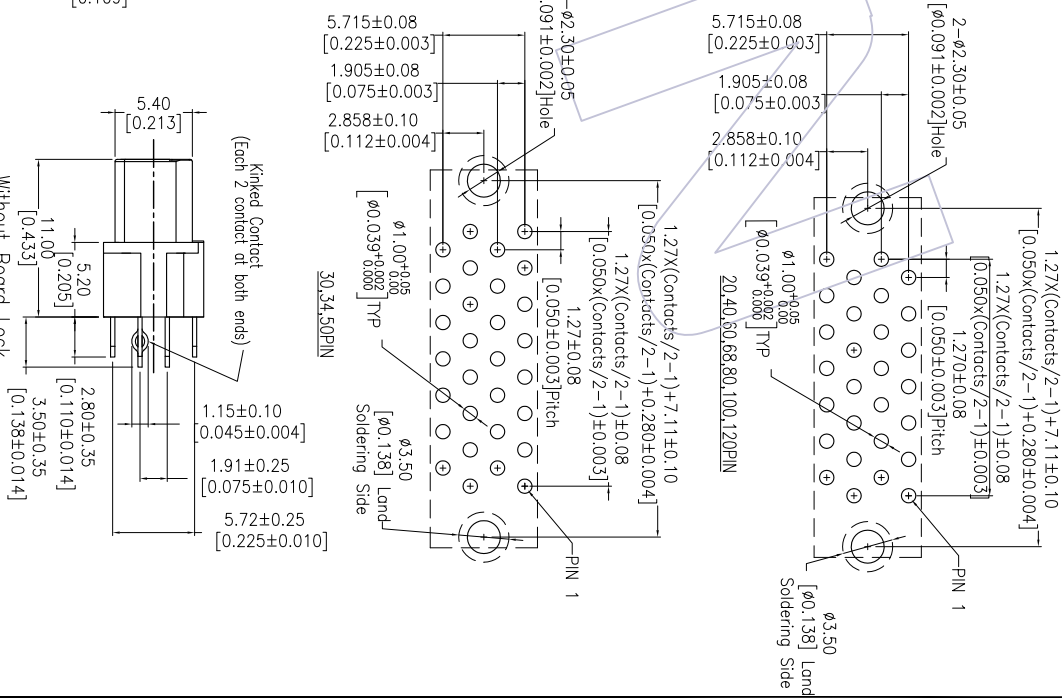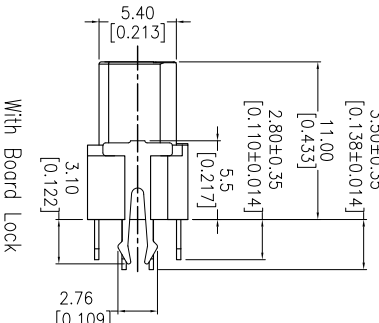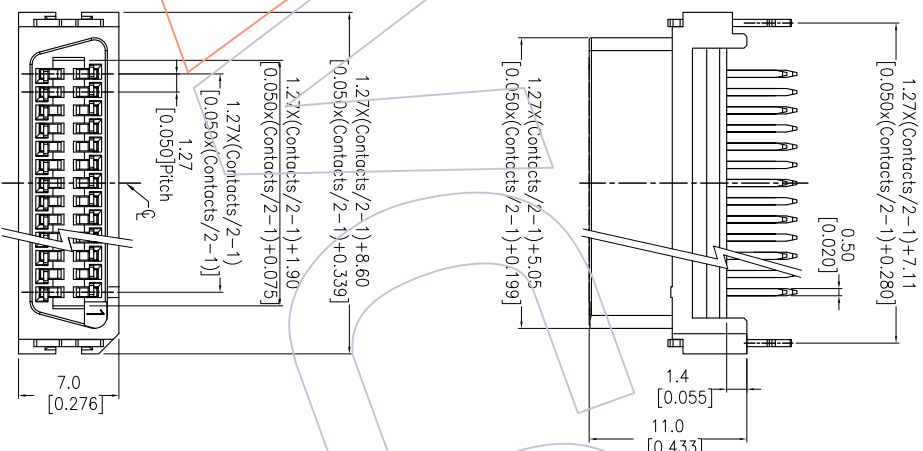

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	Customer NO.
A0	2013/02/05	NEW		XX ±0.40	TSINSN	2013/02/05	mm	6321D-XXXXSDXXPXX01	1.27mm SCST D-TYPE Female 180° DIP	
				XX ±0.25	CHECK		inch			
				XXX ±0.15			A4			
				Angle ± 3'	APPROVE		SHEET 1/1			
				DIM TOL			PROJ.			

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com